#### ON-SITE RECYCLED WATER NOTES FOR RESIDENTIAL SITES

- 1. The installation of the recycled water system shall be accomplished under the approval, inspection, and to the satisfaction of the El Dorado Irrigation District (EID).
- 2. EID will inspect the construction of residential dual plumbed irrigation installations prior to backfilling. The District shall be notified two (2) working days in advance of the desired inspection date by the owner or owner's representative at (530) 295—6873. In no case shall irrigation lines be backfilled before inspection by the District.
- 3. The homeowner shall be responsible for providing access to and cooperation with the District Inspector to perform all testing and inspections.
- 4. There shall be no direct connections between the potable and recycled water systems.
- 5. Recycled water shall not be used for any purpose other than landscape irrigation.
- 6. Hose bibs are prohibited on the recycled water system.
- 7. Water used in hose bibs shall be potable water and hose bibs shall be attached to the house.
- 8. The potable water system shall be protected by an approved backflow prevention assembly. No backflow prevention assembly is required on the recycled water service.
- 9. All potable water lines, including fill lines for water features, shall be connected to the potable water system using copper pipe.
- 10. A minimum of ten (10) feet horizontal separation must be maintained at all times between the constant pressure recycled and potable water lines. A minimum of one (1) foot vertical separation must be maintained at all times between the recycling and potable water lines with the recycled waterline below the potable.
- 11. Blue warning tape shall be placed over pipe in the trench of all pipe carrying potable water.
- 12. Purple warning tape shall be placed over pipe in the trench of all pipe carrying recycled water.
- 13. Recycled water piping shall be purple and identified as recycled water pipes by continuous marking on both sides. The markings shall include the following: "WARNING RECYCLED WATER DO NOT DRINK", nominal pipe size, pressure rating, and ASTM designations.
- 14. All recycled water sprinkler control valves, isolation valves, regulators, and other devices shall be tagged. Identification shall be weatherproof purple plastic, 3—inches by 4—inches with the words "WARNING RECYCLING WATER DO NOT DRINK". Imprinting shall be permanent and black in color. Use tags manufactured by T. Christy Enterprises or approved equal.
- 15. All spray heads shall be identified with weatherproof purple plastic rings or equivalent identification and adjusted to minimize overspray onto adjacent hardscapes.
- 16. After installation of the recycled and potable water service, a cross connection test and inspection of the irrigation system will be performed.
- 17. The Homeowner or contractor shall arrange with EID for a final irrigation system inspection. EID shall be notified two (2) working days in advance of the desired inspection date at (530) 295—6873. Modifications to the irrigation system may be required.
- 18. Failure to comply with any of the EID's Standards and Regulations may result in termination of recycled and/or potable water service.

EL DORADO IRRIGATION DISTRICT

ON-SITE RECYCLED WATER NOTES
FOR RESIDENTIAL SITES

DRAWN BY	SCALE	REVISION	DATE	BY	EID STANDARD
A.URTEAGA	NONE				DRAWING NO.
APPROVED	DATE				OSR1
B. MUELLER	09/09				00,11

SYMBOL	ITEM	DESCRIPTION
•	LAWN POP-UP SPRAY	4" POP-UP, 8' RADIUS
<u> </u>	LAWN POP-UP SPRAY	4" POP-UP, 12' RADIUS
<b>✓ ▼</b>	SHRUB POP-UP SPRAY	12" POP-UP, 8' RADIUS
•	REMOTE CONTROL VALVE	RAINBIRD DVF SERIES ELECTRIC CONTROL VALVE WITH RECYCLED TAGS.
	PRESSURE REGULATING VALVE	WILKINS 70 SERIES, 3/4" SIZE
©	CONTROLLER	EXTERIOR MOUNT WITH RECYCLED LABEL.
$\blacksquare$	POTABLE WATER HOSE BIB	
X	VALVE	
	RECYCLED WATER MAINLINE	SCH. 40 PURPLE PVC PIPE, SIZE PER PLAN
	POTABLE WATER MAINLINE	SCH 40 WHITE PVC WITH 3" CAUTION TAPE
	RECYCLED WATER LATERAL	CLASS 200 PURPLE PVC PIPE, SIZE PER PLAN
=======	RECYCLED WATER SLEEVING	2" SCHEDULE 40 PURPLE PVC PIPE
	POTABLE COPPER WATER PIPE	

A1 13.25 GPM	——————————————————————————————————————
1/2/	INDICATES GALLONS PER MINUTE
\11/4	INDICATED REMOTE CONTROL VALVE SIZE


#### **NOTES**

 INSTALLATION OF RECYCLED WATER IRRIGATION SYSTEM SHALL BE IN CONFORMANCE WITH EID ON—SITE DESIGN AND CONSTRUCTION STANDARDS.

# EL DORADO IRRIGATION DISTRICT

## IRRIGATION LEGEND EXAMPLE SUBMITTAL PLAN/RECYCLED WATER


DRAWN BY	SCALE	REVISION	DATE	BY	EID STANDARD
A.URTEAGA	NONE				DRAWING NO.
APPROVED	DATE				OSR2
B. MUELLER	09/09				03/12

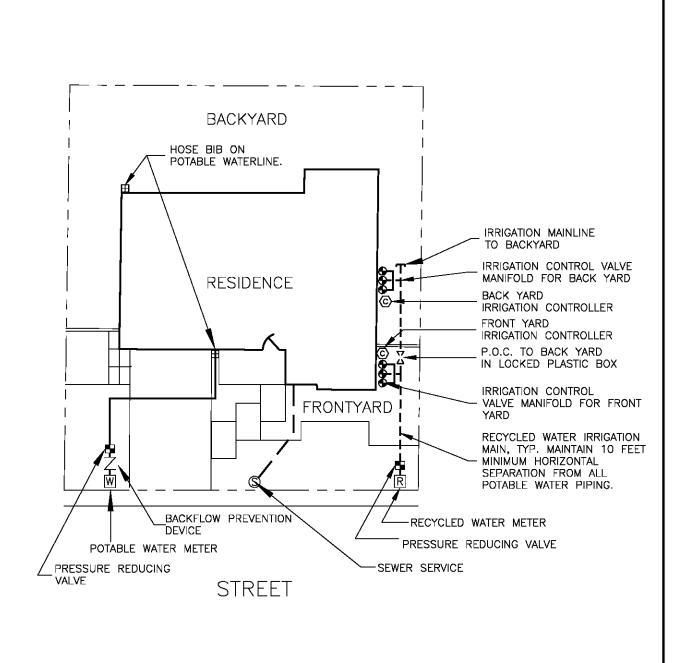


# EL DORADO IRRIGATION DISTRICT

## RESIDENTIAL DUAL PLUMBED SERVICE

DRAWN BY	SCALE	REVISION	DATE	BY	EID STANDARD
A.URTEAGA	NONE				DRAWING NO.
APPROVED	DATE				OSR3
B. MUELLER	09/09				03/10

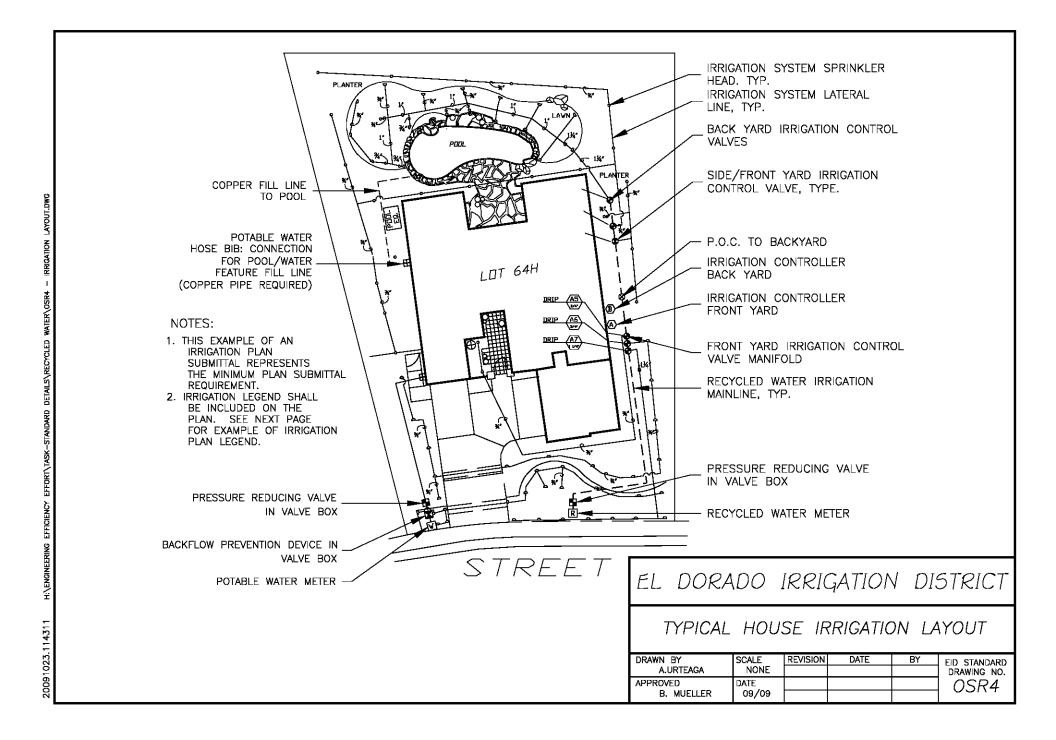

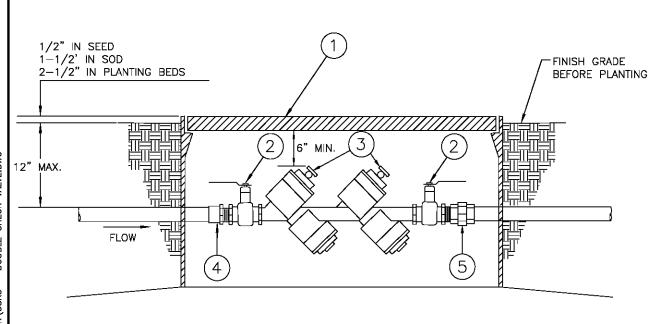

ITEM #	DESCRIPTION
1	METER BOX 12"x20" CONCRETE BOX & STEEL LID
2	BALL VALVE, SUPPLIED WITH BACKFLOW PREVENTER BY MANUFACTURER.
3	DOUBLE CHECK BACKFLOW PREVENTER
4	BRASS ADAPTOR, TYP.
(5)	BRASS UNION DOWNSTREAM OF VALVE


### CONSTRUCTION NOTES

- PLACE VALVE BOX AT RIGHT ANGLES TO STRUCTURES OR HARDSCAPING
- 2. INSTALL VALVE BOX SO THAT TOP OF VALVE BOX IS FLUSH WITH ADJACENT HARDSCAPING.
- GATE VALVE AND FITTINGS SHALL BE LINE SIZE UNLESS NOTED OTHERWISE.

# EL DORADO IRRIGATION DISTRICT


## POTABLE WATER DOUBLE CHECK VALVE FOR DUAL PLUMBED HOMES

DRAWN BY	SCALE	REVISION	DATE	BY	EID STANDARD
A.URTEAGA	NONE				DRAWING NO.
APPROVED	DATE				OSR5
B. MUELLER	09/09				00/10

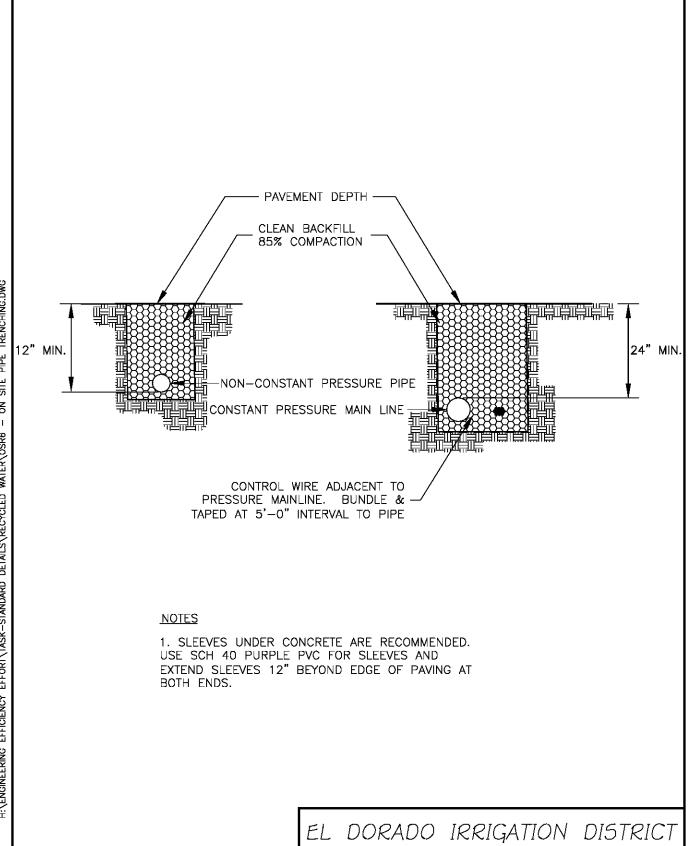

## ONSITE IRRIGATION PIPE TRENCHING FOR RECYCLED WATER SYSTEM

DRAWN BY	SCALE	REVISION	DATE	BY	EID STANDARD
A.URTEAGA	NONE				DRAWING NO.
APPROVED	DATE				OSR6
B. MUELLER	09/09				00,10

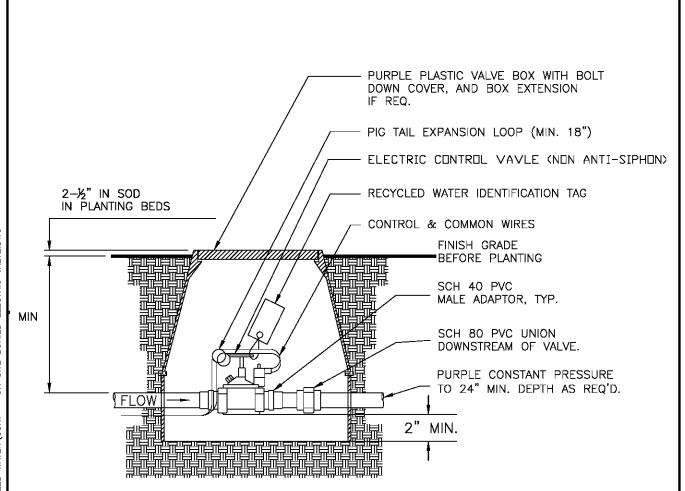


#### **NOTES**

1. ATTACH DOUBLE SIDED IDENTIFICATION TAGS LABELED IN ENGLISH AND SPANISH: "WARNING — RECYCLED WATER DO NOT DRINK".

# EL DORADO IRRIGATION DISTRICT

# ONSITE IRRIGATION BURIED ELECTRIC REMOTE CONTROL VALVE

DRAWN BY	SCALE	REVISION	DATE	BY	EID STANDARD
A.URTEAGA	NONE				DRAWING NO.
APPROVED	DATE				OSR7
B. MUELLER	09/09				

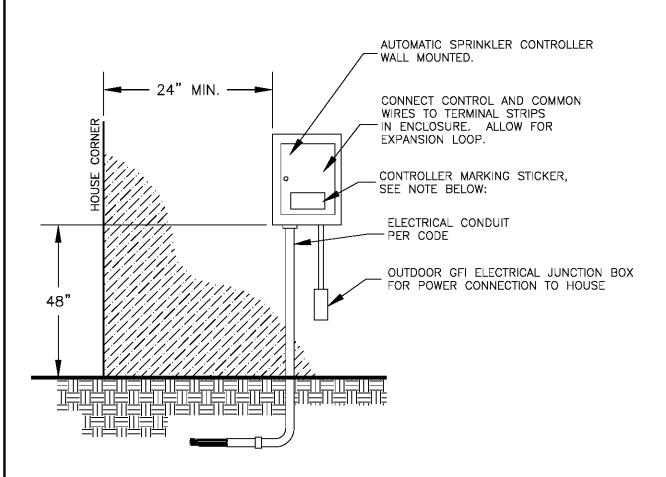

#### NOTES:

- 1. CONTROL WIRING (AWG. UF #14). SECURE TO TERMINAL STRIP PROVIDED IN ENCLOSURE.
- 2. COMMON WIRE TO BE WHITE & CONTROL WIRE TO BE RED. BUNDLE AND TAPE WIRING AT INTERVALS OF 10'-0" O.C.
- 3. NO SPLICES TO BE MADE BETWEEN CONTROLLER AND VALVE.
- 4. INSTALL CONTROLLER MARKING STICKER:
  "ATTENTION CONTROLLER UNIT FOR RECYCLED WATER"
  ATTACH STICKER INSIDE CONTROLLER CABINET DOOR.

# EL DORADO IRRIGATION DISTRICT

ONSITE IRRIGATION AUTOMATIC CONTROLLER — WALL MOUNT

DRAWN BY	SCALE	REVISION	DATE	BY	EID STANDARD
A.URTEAGA	NONE				DRAWING NO.
APPROVED	DATE				OSR8
B. MUELLER	09/09				00/10